


Sigen Battery

- Large cell capacity, low voltage & durable
- Multi-layer full battery safety protection
- Visible battery status on mySigen App
- Quick connectors for fast installation
- AI enablement, optimized battery cycle life
- Parallel connections for flexible battery mix

Sigen Battery 5.0 / 8.0 kWh

SigenStor BAT	5.0	8.0	Units
Performance Specification			
Battery type	LiFePO ₄		
Total energy capacity	5.38	8.06	kWh
Usable energy capacity ¹	5.2	7.8	kWh
Battery modules voltage range (single phase system)	300 ~ 600		V
Battery modules voltage range (three phase system)	600 ~ 900		V
Max. charge / discharge power	2500	4000	W
Peak charge / discharge power (10 seconds)	3750	6000	W
General Data			
Weight	55	70	kg
Dimensions (W / H / D)	767 / 270 / 260		mm
Storage temperature range	-25 ~ 60		°C
Operating temperature range	-20 ~ 55		°C
Relative humidity range	5% ~ 95%		
Max. operating altitude	4000		m
Cooling	Natural convection		
System ingress protection rating	IP66		
Installation method	Floor standing / Wall-mounted		
Standard Compliance			
Standard	IEC/EN 60730-1, UN 38.3, IEC/EN 62619, IEC/EN 63056, IEC/EN 62040		

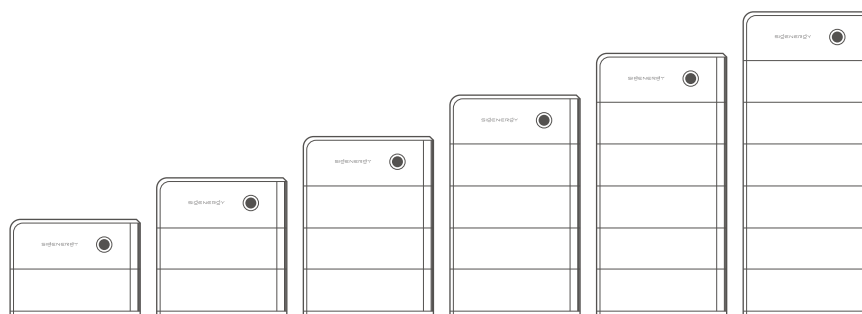

Number of battery modules ²	1	2	3	4	5	6	pcs
Total energy capacity	8.06	16.12	24.18	32.24	40.3	48.36	kWh
Max. charge / discharge power	4	8	12	16	20	24	kW
Peak charge / discharge power (10 seconds)	6	12	18	24	30	36	kW
Total weight	94	165	236	307	378	449	kg
Total height (with base)	640	910	1180	1450	1720	1990	mm
Total width (with decorative covers)	850						mm
Total depth (with decorative covers)	260						mm

1. Test conditions: 100% depth of discharge, 0.2C rate charge & discharge averagely at 25°C.
2. The combination of SigenStor BAT 8.0 and SigenStor EC single phase as example.